

## InPac 6000 Series

Fully configurable severe duty and explosion proof  
HVAC and building pressurization systems  
7.5–10 ton :: 26.0 to 35.0 kW

### Features and Benefits

#### Built for critical applications

- 50% inherent redundancy in refrigeration circuits
- All-in-one design to allow a single point of connection
- 16-gauge cabinet construction for use in rugged, industrial applications
- Modular design allows improved maintenance and spare parts availability
- Form-C dry contacts for alarm outputs
- Standard motors rated for Class 1 Div 2
- UL Listed electrical panels
- Fully CSA certified systems
- Industry standard voltage configurations, including: 480V 3ph 60Hz; 575V 3ph 60Hz; 380V 3ph 50Hz

### Options and Accessories

- Built in NFPA-496 compliant building purge & pressurization
- Chemical and/or high efficiency particulate filtration
- Electric heat from 10 kW – 40kW
- Air quality monitoring for explosive, toxic, or corrosive gases
- Corrosion resistant coil coatings
- Corrosion resistant condenser section
- Low ambient controls, down to -70°F (-55°C)
- Fresh air stack packages
- Multiple unit control

### Designed to allow full environmental control of your building.

Specific Systems InPac units are engineered and proven to stand up to the rigors and harsh conditions of corrosive and hazardous environments. The InPac line is built to demanding industrial and military specifications and features corrosion resistant coatings and inherent redundancy.

Our InPac units are engineered from the ground up to make your job easier. In fact, our modular design eliminates the need for the integration of systems from multiple vendors. Instead, using a Specific Systems InPac HVAC allows for a single point of connection to perform all of the functions otherwise requiring multiple types of units.

InPac systems are custom-engineered and built-to-order for each customer using a time-proven assembly method. Standard unit cabinets are manufactured of 16-gauge galvanized steel with all-welded construction. The completed cabinet is painted with a finish to help fight corrosion. Standard fan module consists of a motor and direct drive blowers. If any auxiliary (stand-by) fan is needed, it can be provided along with the necessary controls to automatically purge and pressurize the building. The auxiliary fan serves secondarily as a redundant fan should a failure occur to the primary fan.

Starting with our time-proven industrial DX air conditioning system, you can include many options, including those listed at left. This all-in-one design allows quicker and more efficient integration into your structure. Form-C dry contacts for alarm outputs are standard, with full remote controls available through an optional BacNet or LonWorks compatible PLC.



# InPac 6000 Series

- Electrical Data
- Capacity Data
- Preliminary Dimensions


Model	CFM @ 0.50" S.P.		Nominal Capacity	
	60Hz	50Hz	60 Hz	50 Hz
6090	3980	3320	90000	74700
6120	3980	3320	120000	100000

Model	Total Cap. @ 60Hz, 80 DB / 67 WB Entering Evap.				
	75°F (24°C)	85°F (29°C)	95°F (35°C)	110°F (43°C)	120°F (49°C)
6090	107400	102100	96500	147900	85400
(kW)	31.5	29.9	28.3	25.8	24.0
6120	140600	133300	126300	114800	107000
(kW)	41.1	39.1	37.0	33.7	31.3

Model	Sensible Cap. @ 60Hz, 80 DB / 67 WB Entering Evap.				
	75°F (24°C)	85°F (29°C)	95°F (35°C)	110°F (43°C)	120°F (49°C)
6090	74500	72000	69800	66800	64500
(kW)	21.8	21.1	20.5	19.6	18.9
6120	98200	95400	92700	88100	85100
(kW)	28.8	28.0	27.2	15.8	25.0

Model	Total Cap. @ 60Hz, 80 DB / 61.8 WB Entering Evap.				
	75°F (24°C)	85°F (29°C)	95°F (35°C)	110°F (43°C)	120°F (49°C)
6090	98500	93600	88600	81100	76100
(kW)	28.9	27.4	26.0	23.8	22.4
6120	129000	122500	116200	106400	99300
(kW)	37.8	35.9	34.0	31.2	29.1

Model	Sensible Cap. @ 60Hz, 80 DB / 61.8 WB Entering Evap.				
	75°F (24°C)	85°F (29°C)	95°F (35°C)	110°F (43°C)	120°F (49°C)
6090	91000	89000	86500	81100	76100
(kW)	26.7	26.1	25.4	23.8	22.4
6120	120100	116800	114100	106400	99300
(kW)	35.2	34.3	33.5	31.2	29.1

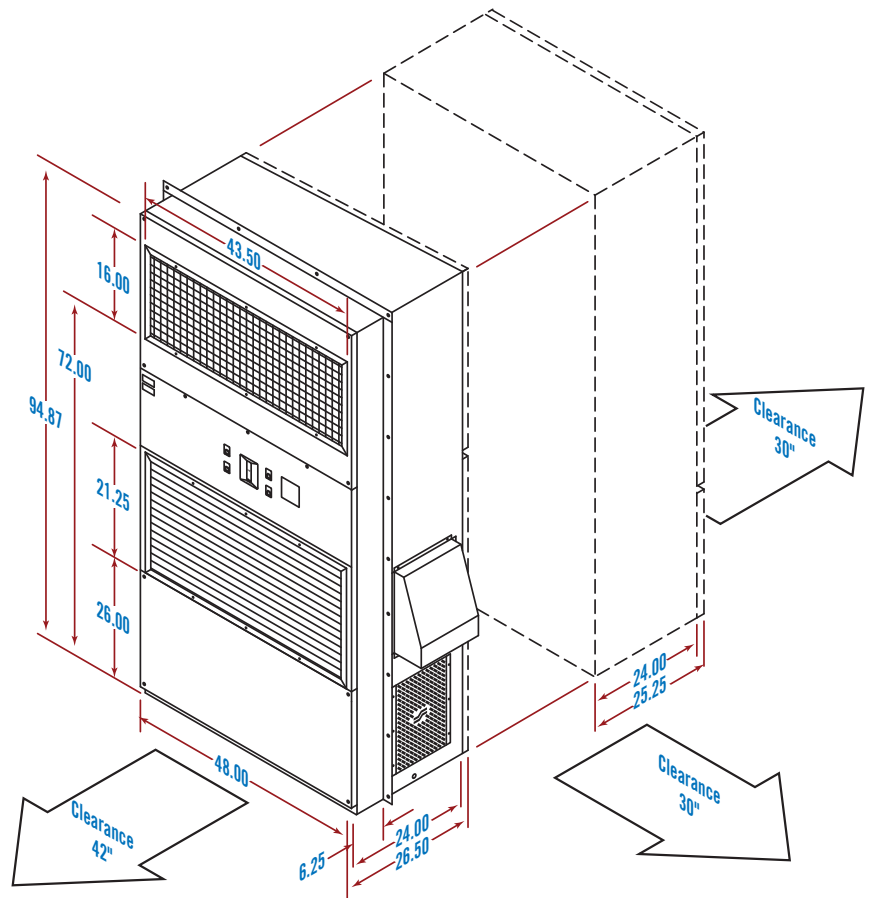

- Dimensions shown are representative of our standard vertical, through-the-wall HVAC and pressurization system
- All dimensions should be considered preliminary, and this drawing should not be used as a final construction document
- Clearances are provided as standard for maintenance. Any required clearances should be confirmed with local regulations or statutes for electrical systems
- Electrical and capacity data provided in this document is accurate at the time of publishing, but Specific Systems reserves the right to modify components in future systems, thereby negating the accuracy of these numbers.
- Please verify all data with your sales representative and subsequent project engineer

<b>MODEL 6090</b>		<b>230/240V</b>	<b>200V</b>	<b>460/480V</b>	<b>230/240V</b>	<b>415V</b>	<b>380V</b>	<b>200V</b>	<b>575V</b>
<b>Electric Power</b>		<b>1Φ-60Hz</b>	<b>1Φ-50Hz</b>	<b>3Φ-60Hz</b>	<b>3Φ-60Hz</b>	<b>3Φ-50Hz</b>	<b>3Φ-50Hz</b>	<b>3Φ-50Hz</b>	<b>3Φ-60Hz</b>
Evaporator Fan Motor FLA		9.4	9.9	4.8	9.6	4.2	4.2	8.4	3.9
Condenser Motor FLA		11.0	22.0	3.1	6.2	2.8	2.8	5.6	2.5
Compressor Motor RLA		21.4	21.4	6.3	14.5	6.2	6.2	21.4	6.0
Heat 20kW, Amps (Actual kW)		53.3 (21.2)	47.6 (17.2)	26.0 (21.6)	53.2 (21.2)	29.3 (19.4)	29.3 (19.4)	47.6 (17.2)	21.7 (21.6)
Heat 15kW, Amps (Actual kW)		37.6 (14.9)	40.8 (14.7)	18.5 (15.4)	37.6 (15.0)	25.0 (16.5)	25.0 (16.5)	40.8 (14.7)	15.5 (15.4)
Heat 10kW, Amps (Actual kW)		26.6 (10.6)	24.1 (8.6)	13.0 (10.8)	26.6 (10.6)	14.8 (9.7)	14.8 (9.7)	23.8 (8.6)	10.8 (10.8)
Total FLA, Cooling	w/o Auxiliary Fan	64.7	74.7	22.0	46.3	20.9	20.9	58.3	19.9
	w/Auxiliary Fan	74.1	84.6	26.8	55.9	25.1	25.1	66.7	23.8
10 kW Heat	MCA w/o Aux Fan	70.1	81.5	24.1	49.9	24.6	24.6	63.7	21.4
	MOP w/o Aux Fan	90.0	100.0	25.0	60.0	25.0	25.0	80.0	25.0
	MCA w/Aux Fan	80.0	91.4	24.1	59.5	28.8	28.8	72.1	21.4
	MOP w/Aux Fan	100.0	100.0	25.0	70.0	30.0	30.0	80.0	25.0
15 kW Heat	MCA w/o Aux Fan	—	—	31.0	60.9	36.9	36.9	65.4	26.1
	MOP w/o Aux Fan	—	—	35.0	70.0	40.0	40.0	80.0	30.0
	MCA w/Aux Fan	—	—	31.0	71.5	41.1	41.1	73.8	26.1
	MOP w/Aux Fan	—	—	35.0	80.0	50.0	50.0	90.0	30.0
20 kW Heat	MCA w/o Aux Fan	—	—	40.4	80.4	42.1	42.1	74.4	33.9
	MOP w/o Aux Fan	—	—	45.0	90.0	45.0	45.0	80.0	35.0
	MCA w/Aux Fan	—	—	40.4	90.0	46.3	46.3	82.8	33.9
	MOP w/Aux Fan	—	—	45.0	100.0	50.0	50.0	100.0	35.0
Operating Range		216V–253V	180V–220V	432V–506V	216V–253V	373V–456V	342V–418V	180V–220V	517V–600V

<b>MODEL 6120</b>		<b>230/240V</b>	<b>200V</b>	<b>460/480V</b>	<b>230/240V</b>	<b>415V</b>	<b>380V</b>	<b>200V</b>	<b>575V</b>
<b>Electric Power</b>		<b>1Φ-60Hz</b>	<b>1Φ-50Hz</b>	<b>3Φ-60Hz</b>	<b>3Φ-60Hz</b>	<b>3Φ-50Hz</b>	<b>3Φ-50Hz</b>	<b>3Φ-50Hz</b>	<b>3Φ-60Hz</b>
Evaporator Fan Motor FLA		9.4	9.9	4.8	9.6	4.2	4.2	8.4	3.9
Condenser Motor FLA		11.0	22.0	3.1	6.2	2.8	2.8	5.6	2.5
Compressor Motor RLA		30.8	30.8	9.7	19.0	12.2	12.2	19.0	7.4
Heat 20kW, Amps (Actual kW)		53.3 (21.2)	47.6 (17.2)	26.0 (21.6)	53.2 (21.2)	29.3 (19.4)	29.3 (19.4)	47.6 (17.2)	21.7 (21.6)
Heat 15kW, Amps (Actual kW)		37.6 (14.9)	40.8 (14.7)	18.5 (15.4)	37.6 (15.0)	25.0 (16.5)	25.0 (16.5)	40.8 (14.7)	15.5 (15.4)
Heat 10kW, Amps (Actual kW)		26.6 (10.6)	24.1 (8.6)	13.0 (10.8)	26.6 (10.6)	14.8 (9.7)	14.8 (9.7)	23.8 (8.6)	10.8 (10.8)
Total FLA, Cooling	w/o Auxiliary Fan	83.5	95.0	28.8	55.3	32.9	32.9	53.5	22.7
	w/Auxiliary Fan	92.9	104.9	33.6	64.9	37.1	37.1	61.9	26.6
10 kW Heat	MCA w/o Aux Fan	91.2	96.3	31.2	60.1	36.0	36.0	58.3	24.3
	MOP w/o Aux Fan	100.0	125.0	40.0	70.0	45.0	45.0	70.0	30.0
	MCA w/Aux Fan	100.6	106.2	36.0	69.7	40.2	40.2	66.7	28.5
	MOP w/Aux Fan	125.0	125.0	40.0	80.0	45.0	45.0	80.0	35.0
15 kW Heat	MCA w/o Aux Fan	—	—	31.2	60.9	36.9	36.9	65.4	26.1
	MOP w/o Aux Fan	—	—	40.0	70.0	45.0	45.0	70.0	30.0
	MCA w/Aux Fan	—	—	36.0	70.5	41.1	41.1	71.4	30.0
	MOP w/Aux Fan	—	—	40.0	80.0	50.0	50.0	80.0	35.0
20 kW Heat	MCA w/Aux Fan	—	—	40.4	80.4	42.1	42.1	74.4	33.9
	MOP w/o Aux Fan	—	—	45.0	90.0	45.0	45.0	80.0	35.0
	MCA w/Aux Fan	—	—	45.2	90.0	46.3	46.3	82.8	37.8
	MOP w/Aux Fan	—	—	50.0	100.0	60.0	60.0	90.0	40.0
Operating Range		216V–253V	180V–220V	432V–506V	216V–253V	373V–456V	342V–418V	180V–220V	517V–600V